




Assembly Instructions

K. Plate Rocket Cross/ Speed

Step 1: Insert the bolts

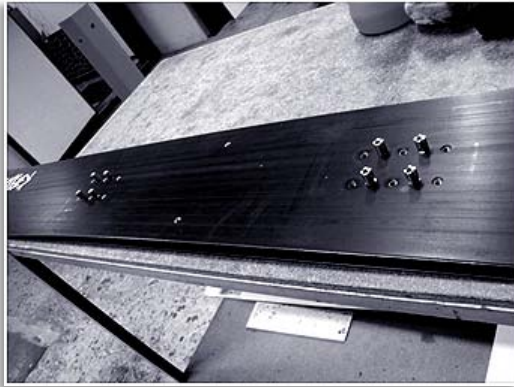


Picture 1: Placement of bolts.

The K. Plate Rocket Cross and the Rocket Speed are both positioned on the board by the use of bolts.

Insert the bolts into the board and tighten by hand (do not use a screwdriver or over tighten bolts). The 4 bolts on either side of the board can then be used to adjust and set the correct foot position for the rider.

Step 2: Attach the plate

In this next step, lay the plates on the board (as per picture 2) to determine the best position of the plates. Ensure that you choose the holes that match the width of the board. The K. Plate Cross/Speed should be as close to the outer edge as possible as per picture 3.

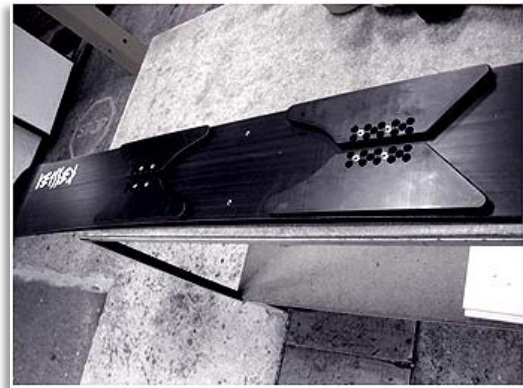

Picture 2: Plate position



Picture 3: Finished result: the plate lines up with outer edge of the board.

